
Positioning of work piece on Pipe-cut machine





Previous problems

- Each cut-pipe is pulled out from feeder side, after cutting. Causing time-loss.

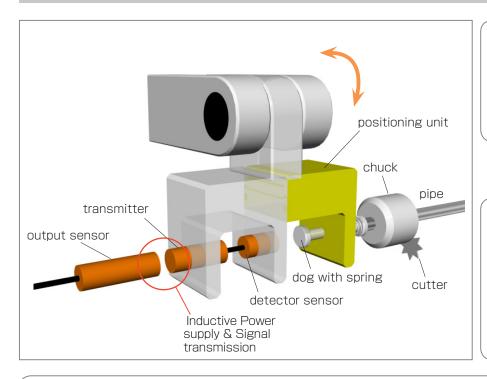



After improvement


- Continuous feed of the pipe in one direction is possible. Simpler and faster process.

Application Positioning unit is swiveled 90 degrees after positioning, and cut pipes are pushed out for continuous processing.

Remote System transmits trigger signal from the positioning unit.







Construction of devices fixed side movable side : positioning unit Power Power output 24<u>V DC</u> Excursive transmitter prox. switch sensor RPT **RPE** PLC **RFD** signal