


Number of connectable antenna  
Interface  
Dimension

5CH  
Parallel 8 bits ( NPN / PNP )

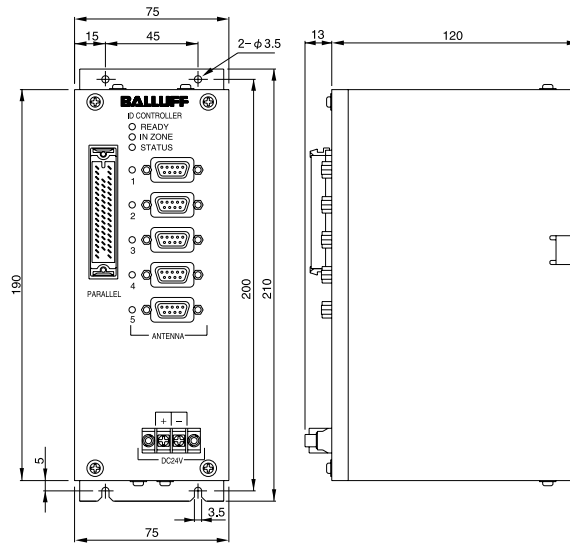

Interface

Parallel 8 bits

NPN

PNP

Type	Applicable Data carrier	511 bytes
		1023 bytes
		2047 bytes
		8K bytes

BIS C-482-Z13

BIS C-482-Z23

BIS C-482-Z14

BIS C-482-Z24

BIS C-482-Z11

BIS C-482-Z21

—

—

Supply voltage

24V DC ± 10%

Current consumption

0.35...0.75A (Depends on number of connectable antenna)

Operating temperature range

0...+55°C

Connection to ID converter

ID cable : BIS C502-STF-PU-<sup>1)</sup>

Connection to Host PLC

—

Remarks

Please request the instruction manual for details about specifications

1) cable length(m):05(standard)、10、20、30、40、50

BIS

C

Products table

Connection

Data carrier

R/W head

Antenna cable

ID converter

Processor

ID cable

IF cable

PC unit

Handy unit

Data coupler unit

installation notes