


Number of connectable antenna	2CH
Interface	CC-Link
Dimension	

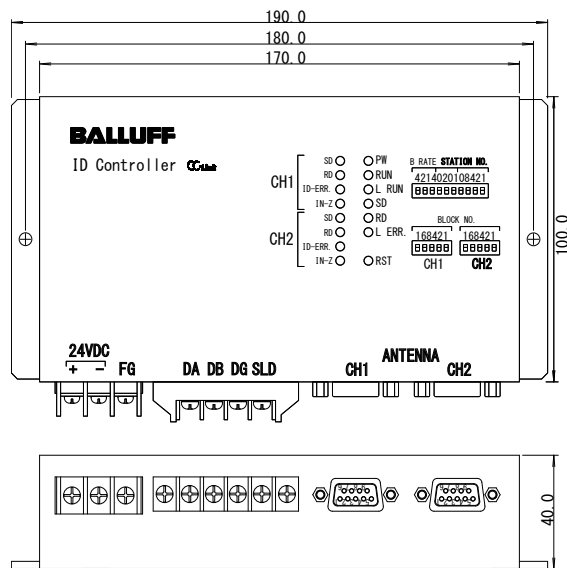

Interface	CC-Link
	4 pole Terminal block

Type	Applicable Data carrier	511 bytes	BIS C-489-13-KBT02
		1023 bytes	BIS C-489-14-KBT02
		2047 bytes	BIS C-489-11-KBT02
		8K bytes	BIS C-489-15-KBT02

Supply voltage	24V DC ± 10%
Current consumption	0.8A
Operating temperature range	0...+55°C

Connection to ID converter	ID cable : BIS C-502-STF-PU-__ ¹⁾
Connection to Host PLC	CC-Link cable ²⁾

Remarks	
---------	--

Please request the instruction manual for details about

1) cable length(m):05(standard)、10、20、30、40、50
2) Please prepare the cable for CC-Link