


Number of connectable antenna	2CH (Built in converter)
Interface	Device Net
Dimension	

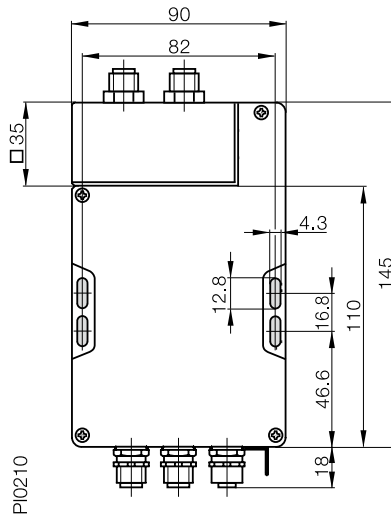

Interface	Device Net
-----------	------------


Type	Applicable Data carrier	511 bytes	BIS C-6003-025-650-03-ST12
		1023 bytes	
		2047 bytes	
		8K bytes	

Supply voltage	24V DC±20%
Current consumption	0.4A
Operating temperature range	0...+50°C

Connection to ID converter	Connect R/W head directly(4PConnector x 2 )
Connection to external devices	5 pin Connector x 3

Remarks	EDS file included
---------	-------------------

Please request the instruction manual for details about specifications.	Protection class : IP 65
---	--------------------------



3 directions variable

BIS

C

Products table

Connection

Data carrier

R/W head

Antenna cable

ID converter

Processor

ID cable

IF cable

PC unit

Handy unit

Data coupler unit

installation notes