


Processor ⇔ ID converter or Read/write head

Dimension

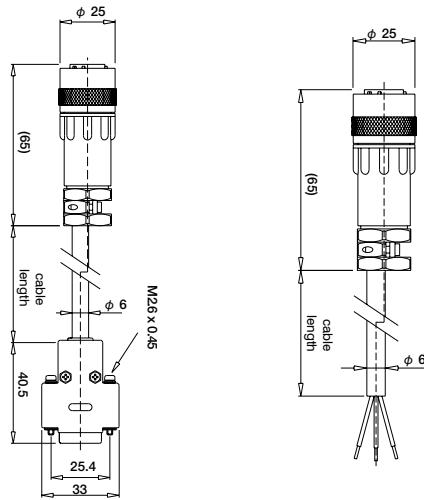

Type	BIS C-502-STF-PU-	BIS C-503-ST-PU-		
Applicable Processor	BIS C-481-ZM1 <input type="checkbox"/> BIS C-481-A3 <input type="checkbox"/> BIS C-482-Z <input type="checkbox"/> BIS C-489-1 <input type="checkbox"/> -KBT02	BIS C-487-1 <input type="checkbox"/> BIS C-488-00		
Connector specification				
cable material	PUR	PUR		
ID converter side	round 8 pin female	round 8 pin female		
Processor side	D-sub 9 pin male	-		


Please specify the type number as shown below;

BIS C-502-STF-PU-05

cable length 05=5m (standard)
10=10m
20=20m
30=30m
40=40m
50=50m

Processor ↔ external control units

Dimension

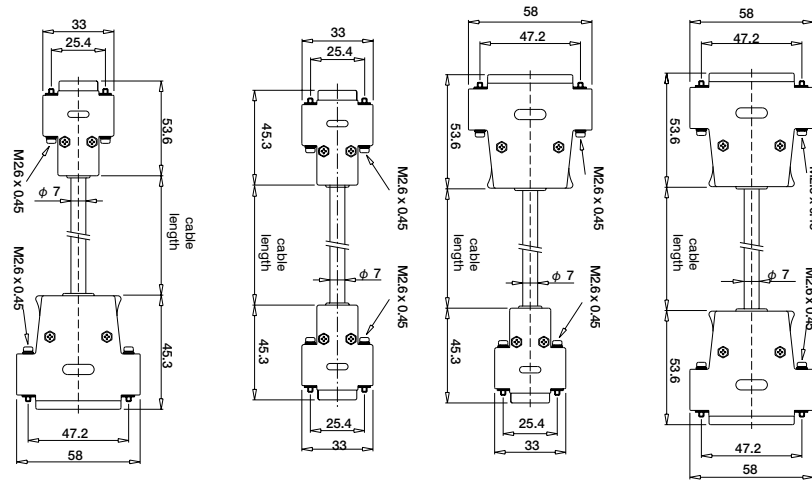

Type	BIS C-502-PC__	BIS C-502-PCJ__	BIS C-502-PCD__	BIS C-502-PCK__	
Applicable Processor	BIS C-481-A3 <input type="checkbox"/> BIS C-481-B3 <input type="checkbox"/>	BIS C-481-A3 <input type="checkbox"/> BIS C-481-B3 <input type="checkbox"/>	BIS C-481-ZM1 <input type="checkbox"/>	BIS C-481-ZM1 <input type="checkbox"/>	
Connector specification					
cable material	PVC	PVC	PVC	PVC	
Processor side	D-sub 9 pin female	D-sub 9 pin female	D-sub 25 pin male	D-sub 25 pin male	
Host PLC side	D-sub 25 pin male	D-sub 9 pin female	D-sub 9 pin female	D-sub 25 pin male	

Please specify the type number as shown below;

BIS C-502-PCK-05

cable length 02=2m
 05=5m
 10=10m
 20=20m

BIS

C

Products table

Connection

Data carrier

R/W head

Antenna cable

ID converter

Processor

ID cable

IF cable

PC unit

Handy unit

Data coupler unit

installation notes