


Number of connectable antenna Interface	2CH MELSEC-Q bus direct-connected
--	--------------------------------------

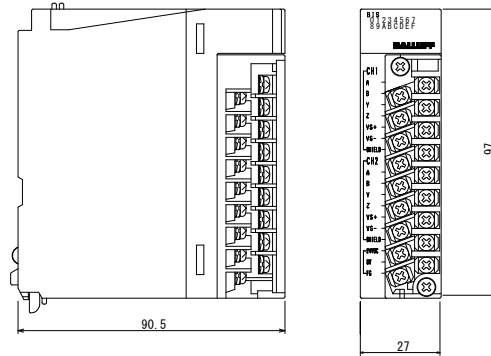

Type	BIS M-688-001
Supply voltage	24V DC $\pm$ 10%
Current consumption	0.7A
Ambient temperature range	0...+55°C
Connection to Read/ write head	Connector cable : BKS-S115-PU-__ / BKS-S116-PU-__
Connection to Host PLC	MELSEC-Q Series installed to the base unit
Remarks	QD35ID1/2* instruction compatible Type : BISM-688-002

\*QD35ID1 and QD35ID2 are ID Interface unit manufactured by Mitsubishi Electric

Please request the instruction manual for details about specifications.