


Number of connectable antenna	2CH
Interface	CC-Link

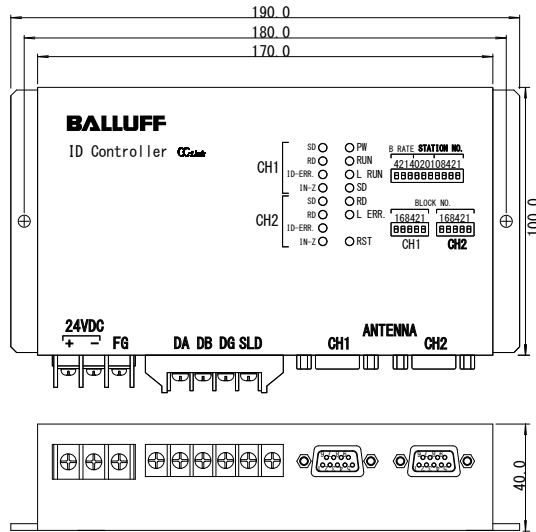

Type	BIS M-689-001
Supply voltage	24V DC \pm 10%
Current consumption	0.8A
Ambient temperature range	0... +55°C
Connection to Read/ write head	Connector cable : BKS-S115-DM-PU-__ / BKS-S116-DM-PU-__
Connection to Host PLC	CC-Link cable ¹⁾
Remarks	

Please request the instruction manual for details about specifications.

1) Please prepare the cable for CC-Link

BIS



Products table

Connection

Data carrier

R/W head

Processor

ID Reader/Writer

Accessories

Handy unit