


Number of connectable antenna	1CH
Interface	Serial / RS-232C
Dimension	

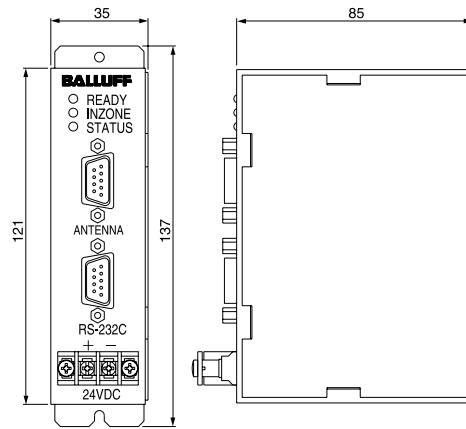

Interface	Serial / RS-232C Balluff protocol / Japanese version
Type	Applicable Data carrier 8K bytes BIS S-401-A30
Supply voltage	24V DC ± 10%
Current consumption	0.25A
Operating temperature range	0...+55°C
Connection to Read/ write head	D-sub connector connection
Connection to Host PLC	IF cable : BIS C-502-PC_ _ ¹⁾ / BIS C-502-PCJ_ _ ¹⁾


Remarks	
---------	--

Please request the instruction manual for details about specifications

1) cable length(m):02(standard)、05、10

1CH

Serial / USB

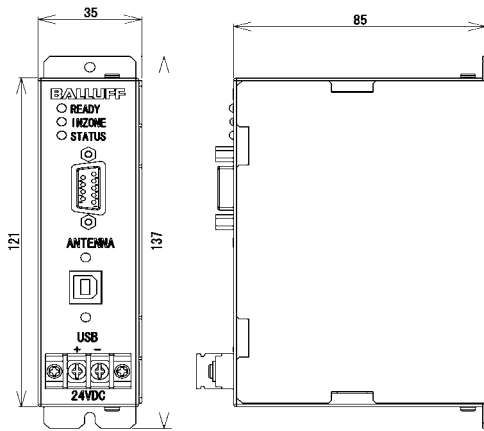

Serial / USB

Balluff protocol / Japanese version

BIS S-405-30

24V DC±10%

0.25A

0...+55°C

D-subconnector connection

IF cable:USB cable

Applicable OS : Microsoft Windows2000 and XP

Included item: Driver CD、 USB cable

BIS

S

Products table

Connection

Data carrier

R/W head

Antenna cable

Processor

IF cable

PC unit

Handy unit

installation notes