


Number of connectable antenna	2CH
Interface	MELSEC bus dorect-connected
Dimension	

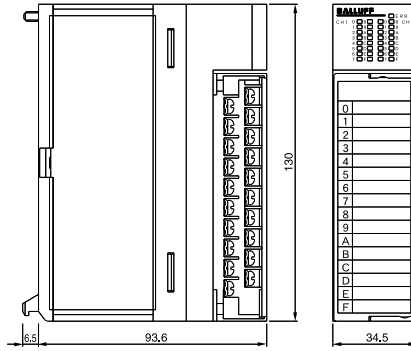

Interface	MELSEC bus dorect-connected For MELSEC AnS / QnAS Series
-----------	---

Type	Applicable Data carrier 8K bytes bytes	BIS S-402-30
------	--	--------------


Supply voltage	24V DC±10% (Eternal power supply) / 5V DC (Sequencer power supply)
Current consumption	0.7A / 0.8A
Operating temperature range	0...+55°C

Connection to Read/ write head	Terminal block connection
Connection to Host PLC	MELSEC base unit attached

Remarks	
---------	--

Please request the instruction manual for details about specifications

2CH
MELSEC bus direct-connected

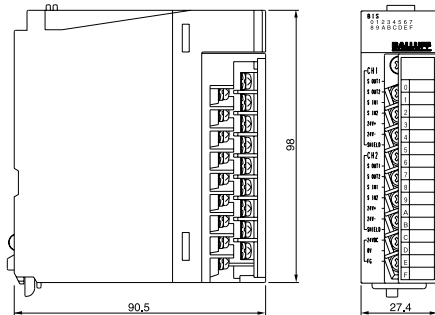

MELSEC bus direct-connected
For MELSEC Q Series

BIS S-403-00

24V DC ± 10% (External power supply) / 5V DC (Sequencer power supply)

0.7A / 0.5A

0...+55°C

Terminal block connection

BIS

S

Products table

Connection

Data carrier

R/W head

Antenna cable

Processor

IF cable

PC unit

Handy unit

installation notes