


| | |
|-------------------------------------|----------|
| Number of connected Read/Write head | 2CH |
| Interface | MELSEC-Q |
| Weight | 230g |

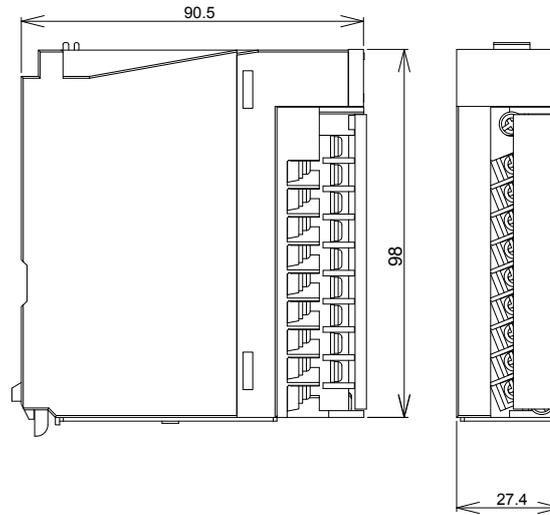

| Type code | Z4-Q001 | Z4-Q002 |
|---------------------------------|---|---------|
| Supply voltage | 24V ± 10% (External power supply) / 5V (Sequencer electric supply source) | |
| Current consumption | 0.75A / 0.5A | |
| Operating temperature | 0...+55°C | |
| Connection with Read/Write head | Directly connection with terminal Z7-A001-PU_ / Z7-A002-PU_ | |
| Connection to host device | Installed in the base unit of Melsec-Q series | |
| Included | CD-ROM | |
| Notice | Mitsubishi Electric ID Interface unit Version for dedicated instruction of QD35ID1 · QD35ID2 | |

■ Please request the instruction manual for details of the specification.